





Stainless



Black

Overlay

# C2275DWR

#### 6444#W vm w

## **FEATURES**

**PERFORMANCE** 

INTERIOR / EXTERIOR

INTEGRATION

- 3.0 cubic feet overall refrigerator capacity and 2 cubic feet of freezer capacity maximizes storage
- Daily ice rate of up to 6 lbs and storage of up to 10 lbs of crescent ice cubes  $(1/2"W \times 3/4"H \times 2-1/2"L)$
- No drain, easy and inexpensive installation, only required a 1/4" diameter outside
- Touch glass digital control featuring easy view command center manages key functions and provides user alerts such as an audible door open alarm
- Digital controlled single-zone convection cooling system provides a stable and consistent environment for optimum food and beverage storage
- Refrigerator temperature setting from 34 to 45° F provides flexibility for preserving a wide variety of items
- Sabbath / Blackout mode turns off all lighting, controls display and automatically resets after 36 hours
- Patented frost-free technology
- UL residential listing

# • Lighted stainless steel interior allows for easy viewing of contents

- Clear organizing bin in top drawer holds wine, 2-liter bottles and other items and slides back and forth for access to items beneath
- Optional slide and divide organizer must be purchased separately PN: U-26013
- Black vinyl clad textured cabinet is more resistant to scratching, peeling and flaking



The Combo® Models

bring together abundant

ice supply with generous

convenience of one unit.


refrigeration capacity in the


C2275DWR - Combo® Model drawer delivers three appliances in one. Top drawer holds up to 3 cubic feet of refrigerator space with clear top sliding bin while lower drawer houses both ice maker and freezer.

- Overlay can be converted to a black model with purchase of a black handle kit PN: 26070-01
- Due to full extension of drawers, anchoring device included and required for all installations
- Overlay model accepts a full 3/4" overlay panel and can be fully integrated into all styles of cabinetry
- Allow I/4" width overall for proper installation (see backside for details)
- No additional clearance around sides, top or rear of unit is needed for ventilation
- Durable, factory installed level legs provide a more precise undercounter fit
- Do not obstruct front grille air flow

8900 NORTH 55TH STREET | MILWAUKEE, WISCONSIN 53223 | 414.354.0300 | FAX 414.354.7905 | U-LINE.COM

<sup>\*</sup>To obtain a black model with a black handle, black integrated kit #26070-01-5 must be ordered.

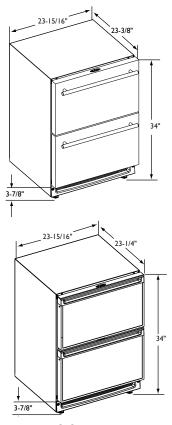



C2275DWRS Stainless Model and C2275DWROL Black Model

## **DIMENSIONS AND SPECIFICATIONS**

#### **OVERALL DIMENSIONS**

Height 34" (86.0) Width 23-15/16" (60.8) Depth 23-5/8" (60) With stainless steel handle 25-1/2" (64.7)

# Shipping Weight:

Black model 158 lbs (72 kg) Stainless model 162 lbs (74 kg)

2.5 Running amps 26.5 Maximum start-up amps

Amps pertain to voltage rating 110/115 volt, 60 Hz

#### Capacities:

Defrost technology Manual defrost Refrigerator volume 3 Cu. Ft Freezer volume 2 Cu. Ft Approximate daily ice production Up to 6 lbs Up to 10 lbs Ice Storage

C2275DWR		
Sta	ainless	U-C2275DWRS-00
Bla	ack	U-C2275D- WROL-00 with Black Integrated handle 26070-01-S
0	verlay	U-C2275DWROL-00

Please visit www.u-line.com for installation guide.

All specifications are subject to change without notice.

